

Applications

- Automatic lubrication of tools by a measured amount of oil mist each time the tool is used
- Provide instant oil flow to time cycled air tools such as staplers and nailers

Features


- Connects directly to the air tool
- Increases efficiency and life time of tool working mechanism by adequate lubrication
- Saves money by reducing maintenance and repair time
- Avoids the costs of wall mounted lubricating systems
- Operates in any position. Will not leak lubricant into air line

Specifications

Maximum Working Pressure
300 PSI

Part No.	Inlet (F) NPT in.	Outlet (M) NPT in.	Air Flow SCFM	Oil Capacity ml
63.3305 (transparent)	1/4	1/4	15	5

Part No.	Inlet (F) NPT in.	Outlet (M) NPT in.	Air Flow SCFM	Oil Capacity ml
63.3310	1/4	1/4	15	5
63.3320	1/4	1/4	20	9
63.3330	3/8	3/8	30	9
63.3340	1/4	1/4	20	22
63.3350	3/8	3/8	40	22
63.3360	1/2	1/2	65	22

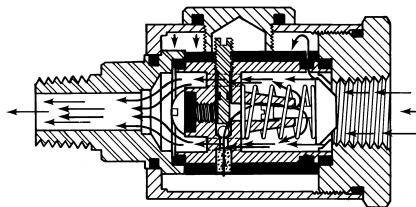

High Capacity In-Line Lubricators

Part No.	Air Inlet (F) NPT In.	Oil Capacity oz
63.3560	1/2	2.6
63.3570	3/4	5.3
63.3575	3/4	8
63.3580	1	16