



Applications

- Designed to keep air volume and pressure from escaping back into compressor heads or into compressed air lines supply

Features

- Two-piece solid brass body
- Patented jam resistant piston design
- Triple-balanced flow outlet
- 1/8-27 (F) NPT exhaust port available on some models

Specifications

Maximum Working Pressure
500 PSI


Maximum Working Temperature
232°C (450°F)

Construction

Body : Brass
Spring : Stainless Steel
Piston : Teflon


CHECK VALVE FOR COMPRESSOR WITH 1/8" (F) NPT UNLOADER PORT

FEMALE NPT TO MALE NPT



Part No.	Inlet (F) NPT	Outlet (M) NPT
11.5231	3/8"	1/2"
11.5232	1/2"	1/2"
11.5233	1/2"	3/4"
11.5234	3/4"	3/4"
11.5235	3/4"	1"
11.5236	1"	1"
11.5237	1-1/4"	1-1/4"
11.5238	3/4"	1-1/2"
11.5239	1-1/2"	1-1/2"


COMPRESSION FITTING MALE NPT (INCLUDES NUT AND CLAMP)



Part No.	Inlet (Compression fitting)	Outlet (M) NPT
11.5350*	tube 3/8"	3/8"
11.5351	tube 3/8"	1/2"
11.5352	tube 1/2"	1/2"
11.5354	tube 3/4"	3/4"
11.5355	tube 3/4"	1"


IN-LINE CHECK VALVE

FEMALE VALVE NPT TO MALE NPT



Part No.	Inlet	Outlet
11.6304	1/4" (F) NPT	1/4" (M) NPT

FEMALE VALVE




Part No.	Thread (F) NPT
11.6314	1/4"
11.6315	3/8"
11.6316	1/2"
11.6317	3/4"
11.6318	1"
11.6319	1-1/2"



Features


- Check valve with stainless steel ball mechanism
- Brass body
- Buna-N or metal to metal seat
- Maximum Working Pressure : 1000 PSI
- Working Temperature :
-40°C to 110°C (-40°F to 230°F)

MALE IN-LINE VALVE NPT

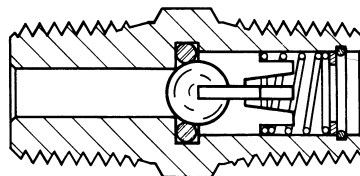

Metal to Metal Seat Part No.	Buna-N Seat Part No.	Thread (M) NPT
11.6334	11.6344	1/4"
11.6336	11.6346	3/8"
11.6337	11.6347	1/2"

FEMALE VALVE (WITH 1/8" (F) NPT UNLOADER PORT)



Part No.	Thread (F) NPT
11.6324	1/4"
11.6325	3/8"
11.6326	1/2"
11.6327	3/4"
11.6328	1"
11.6329	1-1/2"